



# Ammo box rack sliders

Fitment guide for both a 40% and 60% slider assembly.



## CONTENTS


|                                                                  |          |
|------------------------------------------------------------------|----------|
| <b>1. Getting Started:</b>                                       | <b>2</b> |
| <b>1.1. Product contents:</b>                                    | <b>2</b> |
| <b>2. Ammo box rack fitment guide:</b>                           | <b>2</b> |
| <b>2.1. Tools required for fitment:</b>                          | <b>2</b> |
| <b>2.2. Step 1 – Prepare the ammo box rack for fitment:</b>      | <b>3</b> |
| <b>2.3. Step 2 – Place the slider assembly in position:</b>      | <b>4</b> |
| <b>3. Dual slider configuration:</b>                             | <b>5</b> |
| <b>3.1. Placing a 40% slider and 60% slider next to another.</b> | <b>5</b> |
| <b>4. Notes:</b>                                                 | <b>5</b> |

SHOULD YOU HAVE ANY ENQUIRIES ABOUT THE FITMENT, FEEL FREE TO CONTACT US



## 1. Getting Started:

### 1.1. Product contents:

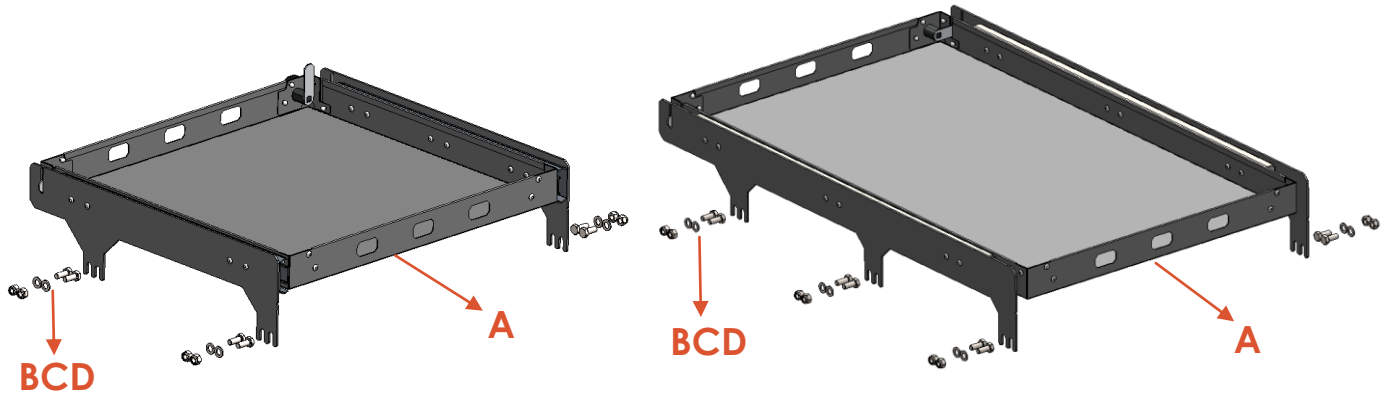

- A. Ammo box rack slider assembly  
 B. M8 x 20 Hexagonal screw  
 C. M8 Flat washer  
 D. M8 Nyloc nut

| <u>40% Slider</u> | <u>60% Slider</u> |
|-------------------|-------------------|
| x 1               | x 1               |
| x 8               | x 12              |
| x 8               | x 12              |
| x 8               | x 12              |

## 2. Ammo box rack fitment guide:



Be aware of the edges on all sheet metal components and take extra care during handling.

Ensure that the area where the slider will be installed is free from any obstructions.



Torque all M8 fasteners to 28.4 Nm  
 The fitment of the ammo box rack will require two people.

### 2.1. Tools required for fitment:

#### COMBINATION WRENCH



- 1 x 13mm Spanner

#### SOCKET WRENCH





- 1 x 13mm Socket

SHOULD YOU HAVE ANY ENQUIRIES ABOUT THE FITMENT, FEEL FREE TO CONTACT US

## 2.2. Step 1 – Prepare the ammo box rack for fitment:

- Choose the desired orientation of the slider. The slider can either open to the left-or-right hand side of the canopy.
- **For the 40% slider**, slide 4 x M8 x 20 hexagonal screws into each side of the ammo box rack. Fig. 2.2.1
- **For the 60% slider**, slide 6 x M8 x 20 hexagonal screws into each side of the ammo box rack. Fig. 2.2.2

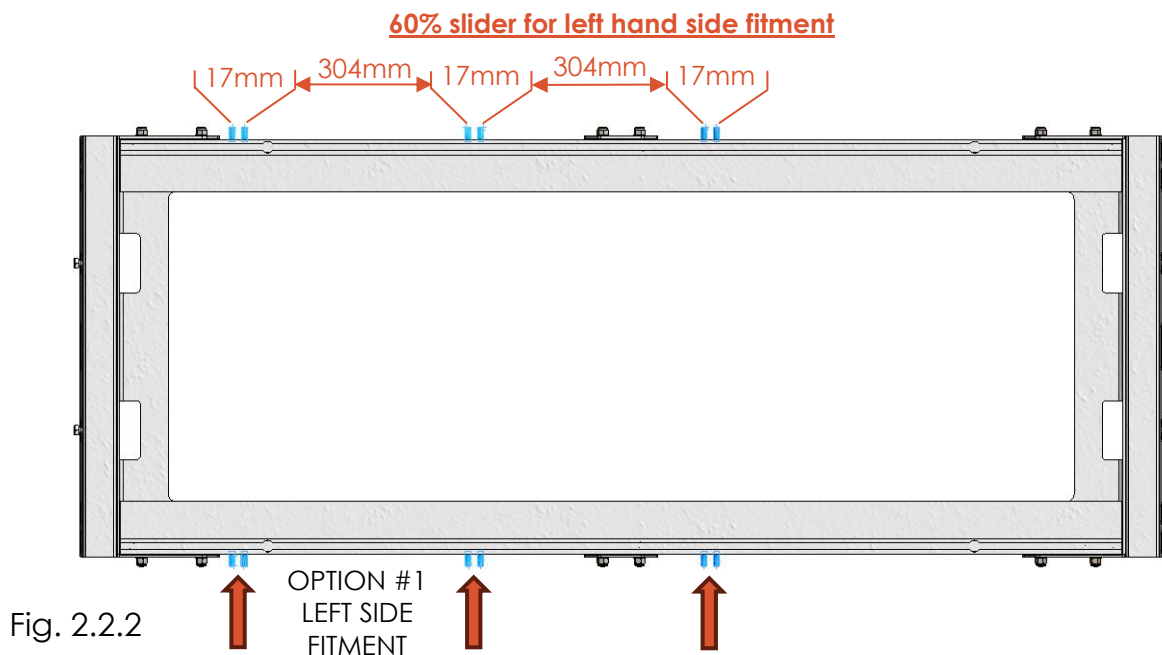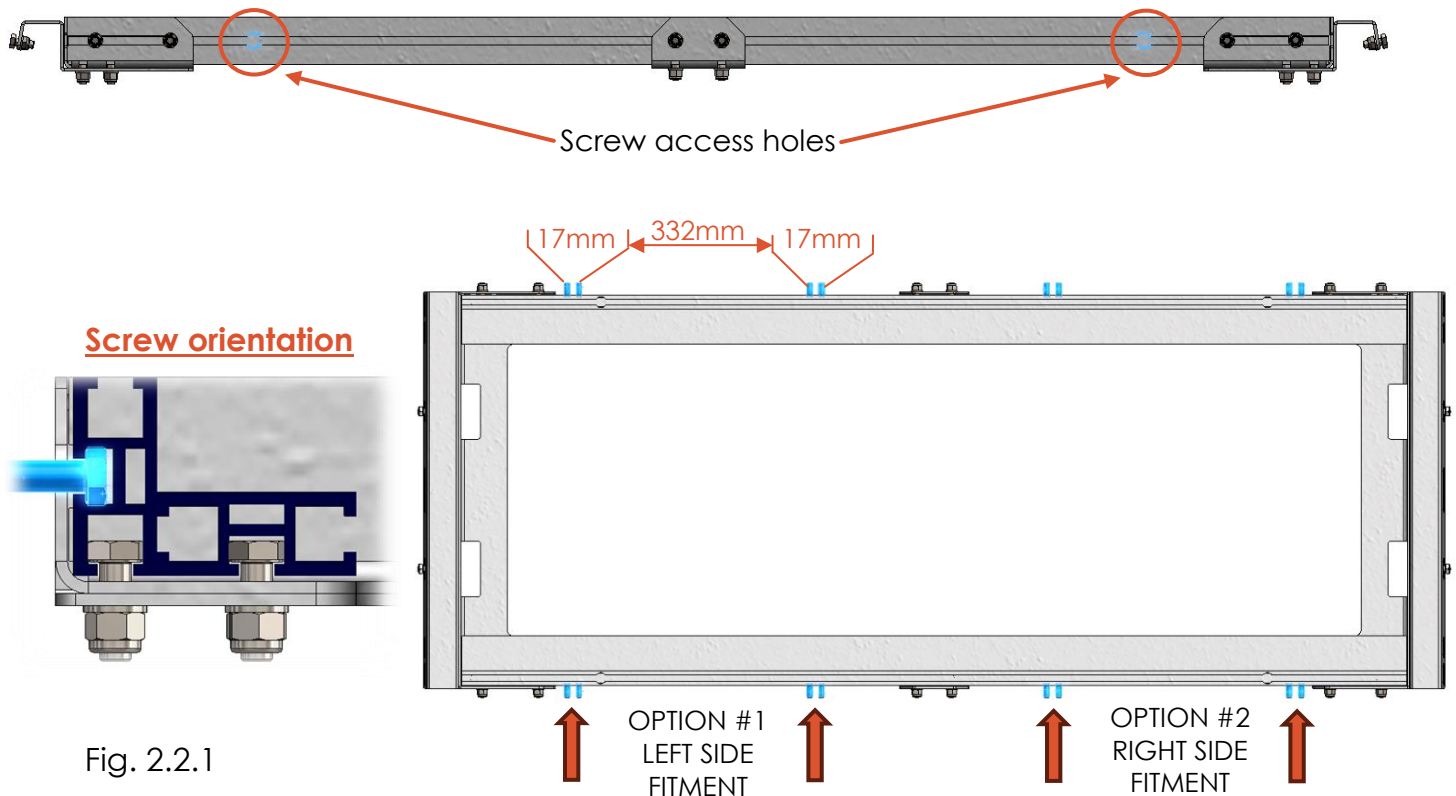

SHOULD YOU HAVE ANY ENQUIRIES ABOUT THE FITMENT, FEEL FREE TO CONTACT US



**60% slider for right hand side fitment**

Fig. 2.2.2

**2.3. Step 2 – Place the slider assembly in position:**

- Fit the complete slider assembly over the previously installed M8 screws by locating the slots at the lower end of the brackets as per the illustration. Ensure that the slider is facing the correct direction. Fig. 2.3.1
- Secure all the screws with 1 x M8 flat washer and 1 x M8 nyloc nut. Fig. 2.3.2

Ensure the locks are facing towards the desired opening direction.

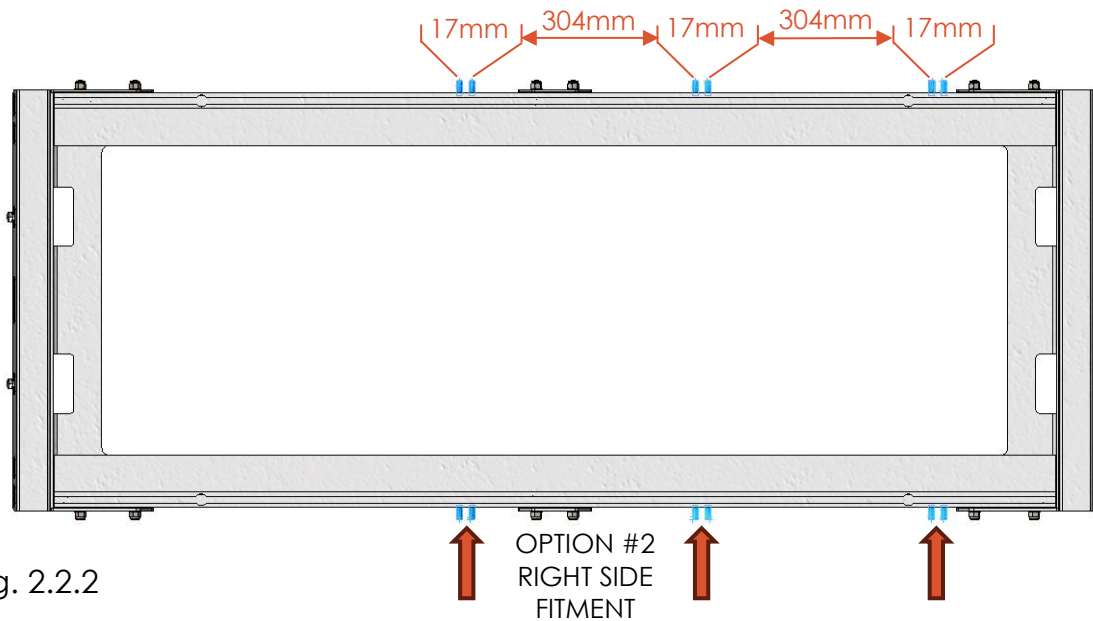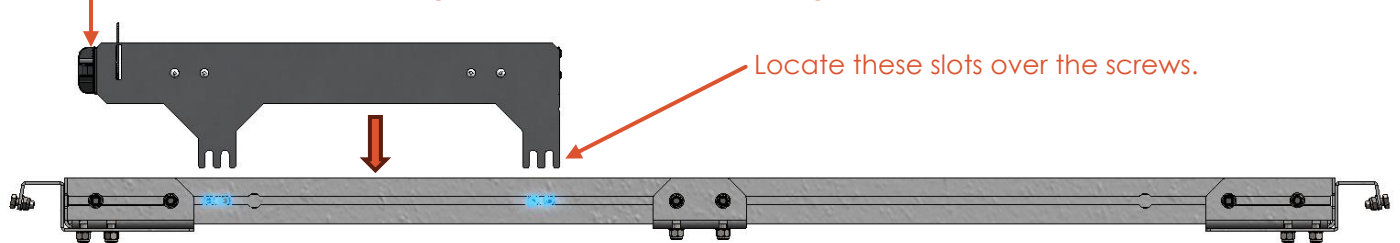

Ensure the locks are facing towards the desired opening direction.


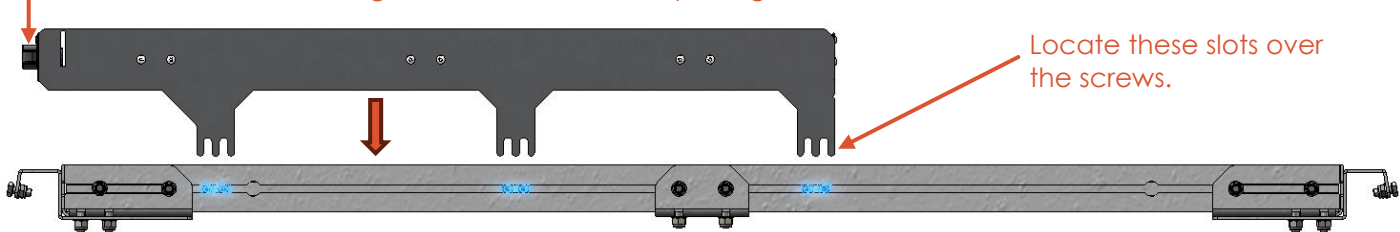


Fig. 2.3.1

SHOULD YOU HAVE ANY ENQUIRIES ABOUT THE FITMENT, FEEL FREE TO CONTACT US

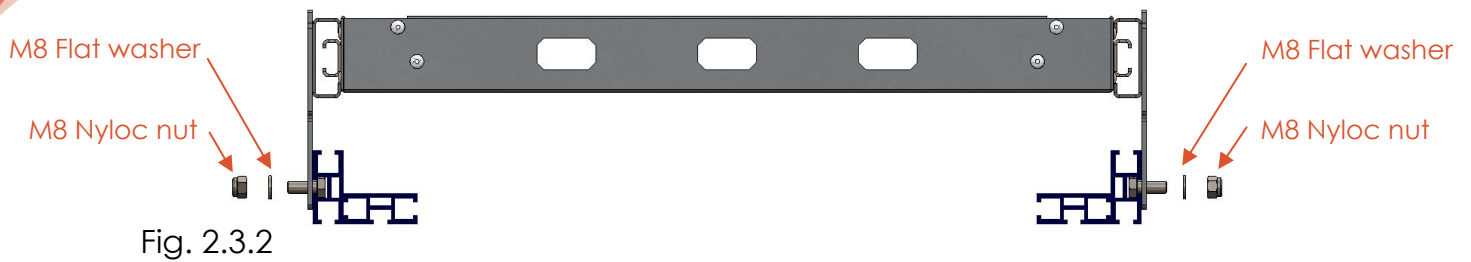



### 3. Dual slider configuration:

**PLEASE  
NOTE...**

Both sliders can be placed either left-or-right hand side for this configuration.

#### 3.1. Placing a 40% slider and 60% slider next to another.

- A 40% slider and 60% slider can be placed next to another by ensuring that both sliders are positioned correctly as follows:

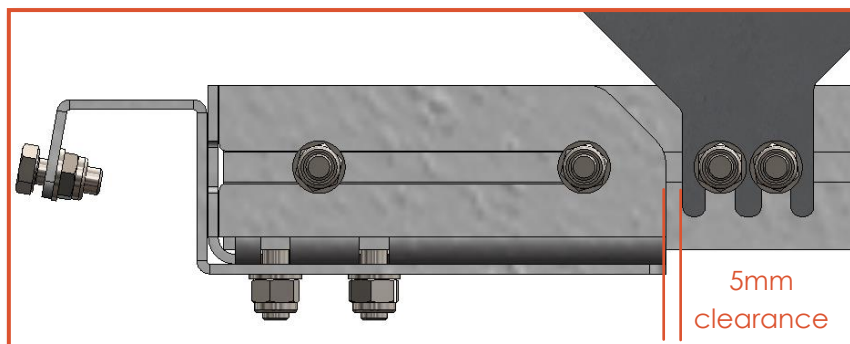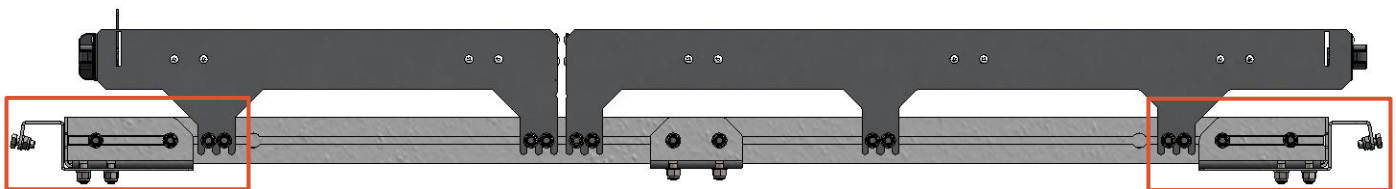

### 4. Notes:

- You have now successfully completed the fitment of your Rhinoman ammo box rack slider.
- Confirm that all the fitment screws have been properly tightened one last time.
- Be sure to check at least bi-monthly that all the screws are still properly tightened.

SHOULD YOU HAVE ANY ENQUIRIES ABOUT THE FITMENT, FEEL FREE TO CONTACT US